


# Median Location: 2-D Rectilinear Distance 8 EFs

*Median location:* For each dimension  $x$  of  $X$ :

1. Order EFs so that  $|x_1| \leq |x_2| \leq \dots \leq |x_m|$

2. Locate  $x$ -dimension of NF at the first EF $_j$  where  $\sum_{i=1}^j w_i \geq \frac{W}{2}$ , where  $W = \sum_{i=1}^m w_i$


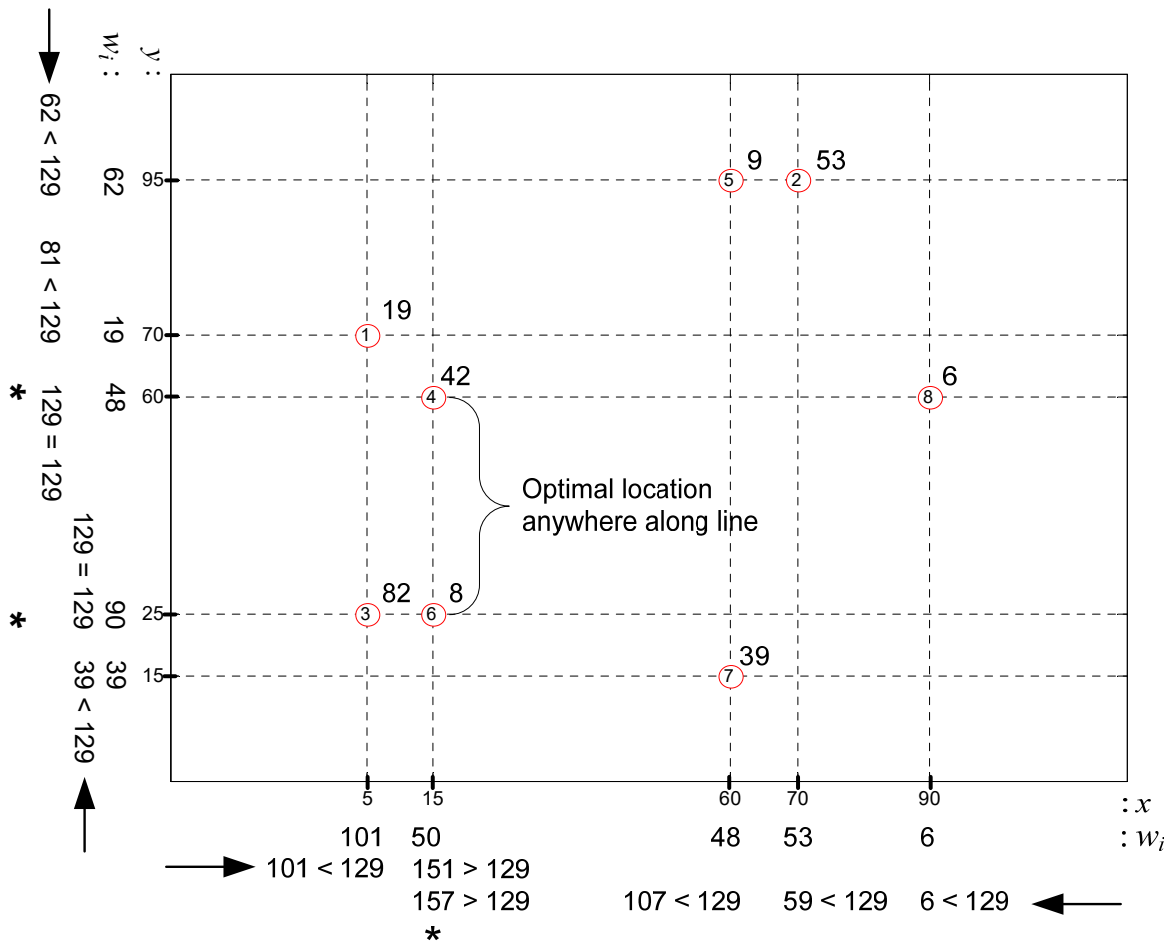


$$d_1(P_1, P_2) = |x_1 - x_2| + |y_1 - y_2|$$

$$d_2(P_1, P_2) = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

# Ex 3: 2D Loc with Rect Approx to GC Dist

- It is expected that 25, 42, 24, 10, 24, and 11 truckloads will be shipped each year from your DC to six customers located in Raleigh, NC (36N,79W), Atlanta, GA (34N,84W), Louisville, KY (38N,86W), Greenville, SC (35N, 82W), Richmond, VA (38N,77W), and Savannah, GA (32N,81W). Assuming that all distances are rectilinear, where should the DC be located in order to minimize outbound transportation costs?

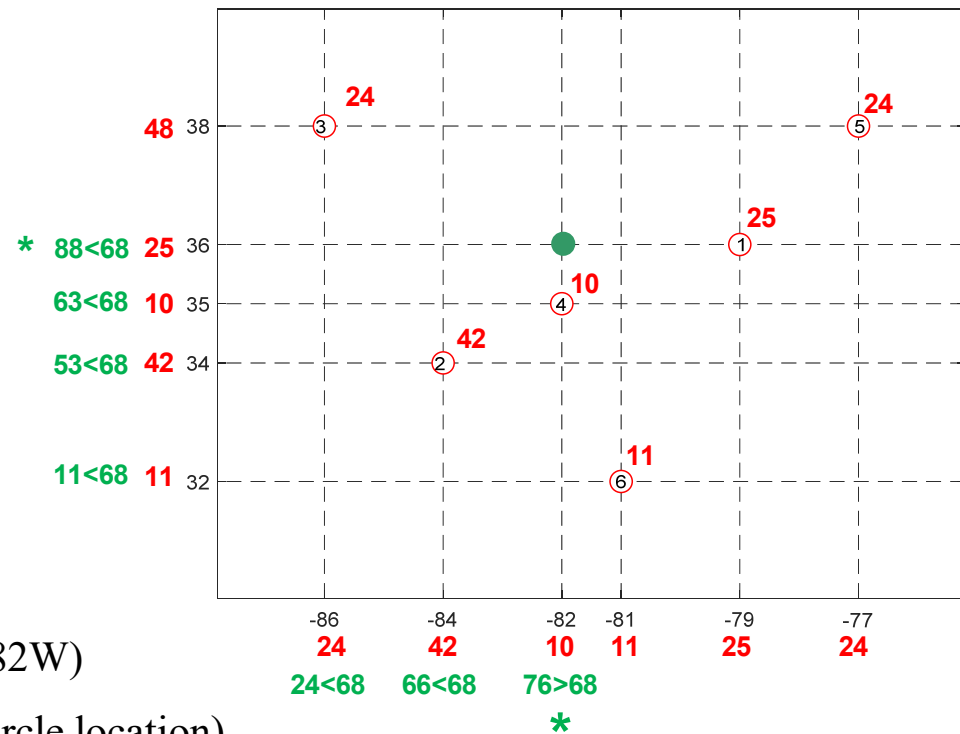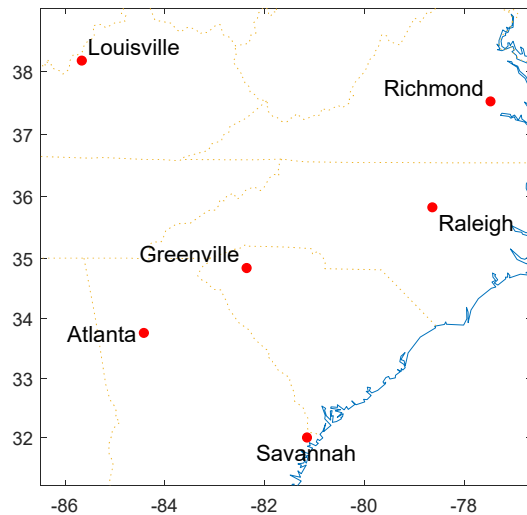


$$W = \sum w_i = 136, \quad \frac{W}{2} = 68$$


**Answer :** Optimal location (36N,82W)

(65 mi from opt great-circle location)

# Logistics Network for a Plant

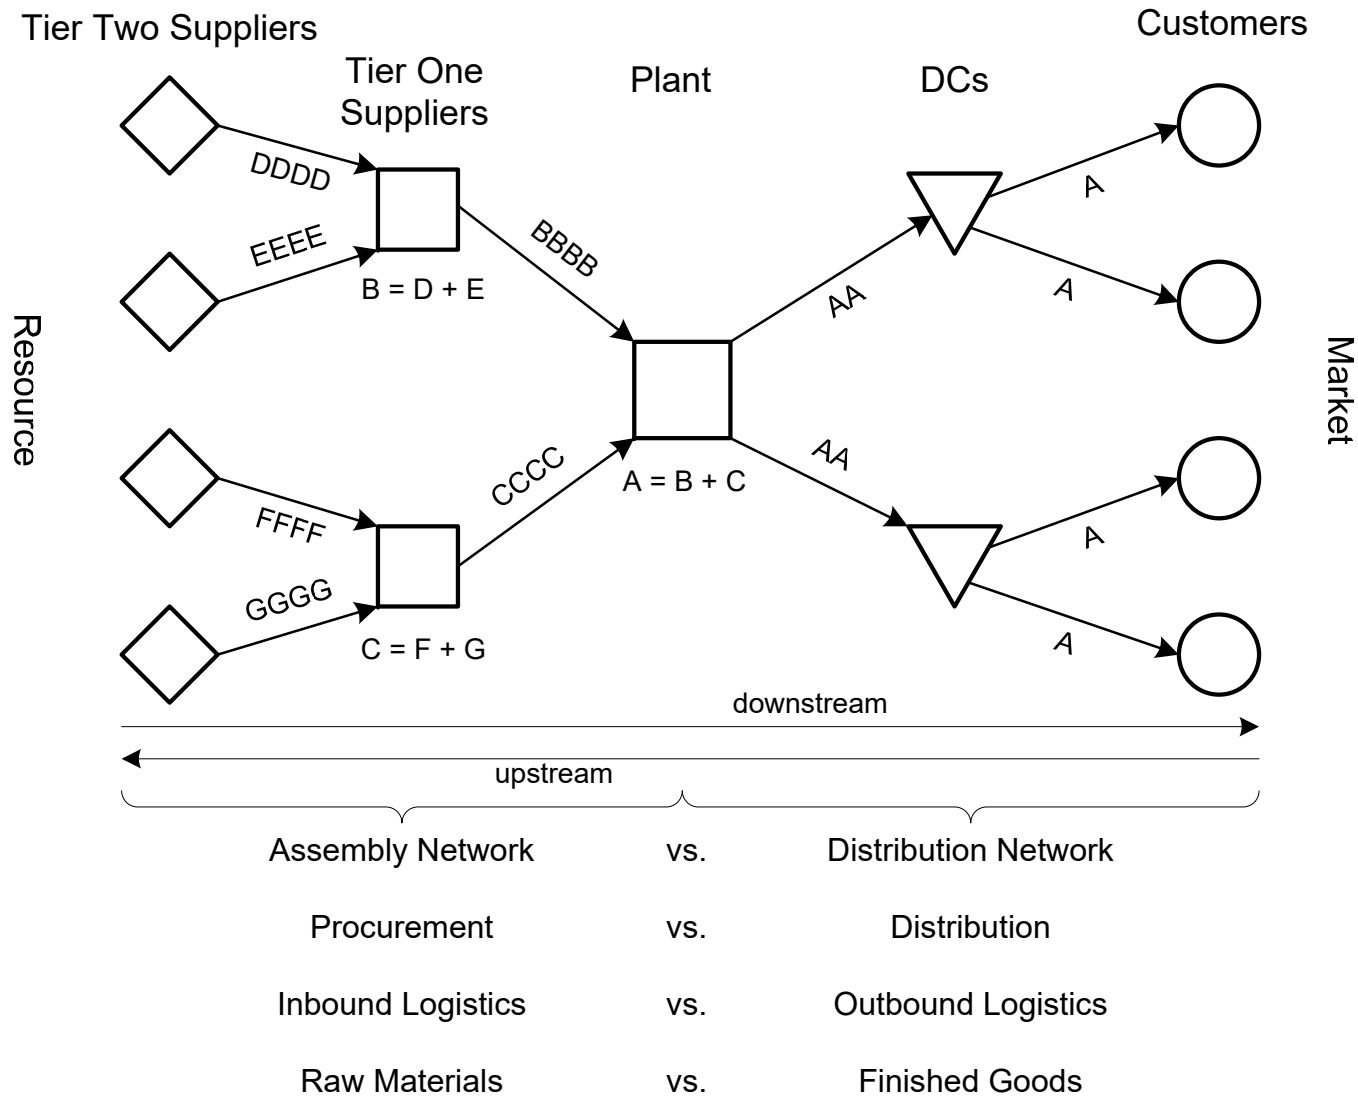

# Basic Production System

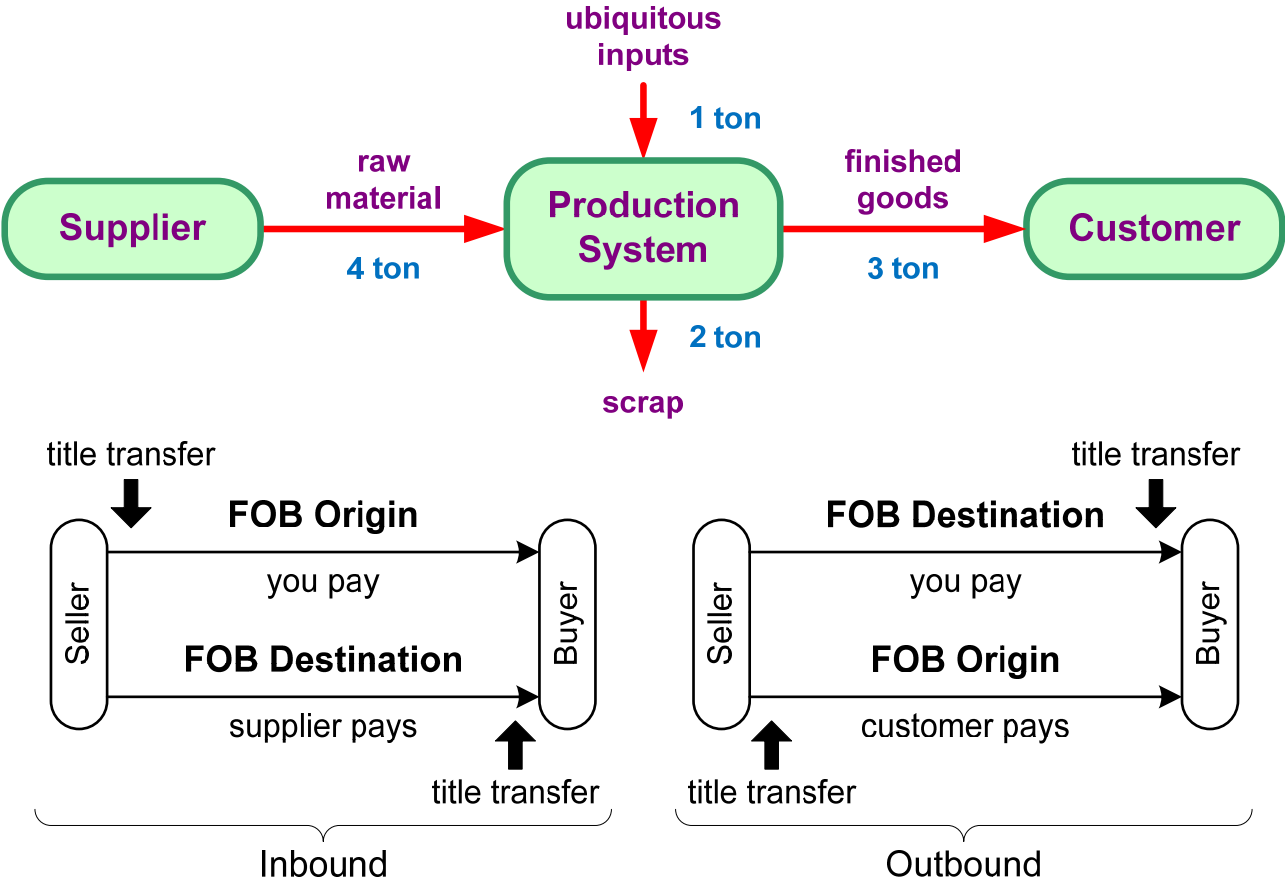

**FOB (free on board)**

# FOB and Location

- Choice of FOB terms (who directly pays for transport) usually does not impact location decisions:

$$\text{Procurement cost} = \text{Landed cost at supplier} + \text{Inbound transport cost}$$

$$\text{Production cost} = \text{Procurement cost} + \text{Local resource cost (labor, etc.)}$$

$$\text{Total delivered cost} = \text{Production cost} + \text{Outbound transport cost}$$

$$\text{Transport cost (TC)} = \text{Inbound transport cost} + \text{Outbound transport cost}$$

- *Purchase price* from supplier and *sale price* to customer adjusted to reflect who is paying transport cost
- Usually determined by who can provide the transport at the lowest cost
  - Savings in lower transport cost allocated (bargained) between parties

# Monetary vs. Physical Weight

$$\min TC(X) = \sum_{i=1}^m w_i d(X, P_i) = \sum_{i=1}^m \underbrace{f_i r_i}_{w_i} d(X, P_i)$$

where  $TC$  = total transport cost (\$/yr)

$w_i$  = monetary weight (\$/mi-yr)

$f_i$  = physical weight rate (ton/yr)

$r_i$  = transport rate (\$/ton-mi)

$d(X, P_i)$  = distance between NF at  $X$  and  $EF_i$  at  $P_i$  (mi)

NF = new facility to be located

EF = existing facility

$m$  = number of EFs

(Monetary) Weight Gaining:  $\sum w_{in} < \sum w_{out}$

Physically Weight Losing:  $\sum f_{in} > \sum f_{out}$

# Minisum Location: TC vs. TD

- Assuming local input costs are
  - same at every location or
  - insignificant as compared to transport costs,the minisum transport-oriented single-facility location problem is to locate NF to minimize TC
- Can minimize total distance (TD) if transport rate is same:

$$\min TD(X) = \sum_{i=1}^m w_i d(X, P_i) = \sum_{i=1}^m \underbrace{f_i r_i}_{w_i} d(X, P_i)$$

where  $TD$  = total transport distance (mi/yr)



$w_i$  = monetary weight (trip/yr)

$f_i$  = trips per year (trip/yr)

$r_i$  = transport rate = 1

$d(X, P_i)$  = per-trip distance between NF and  $EF_i$  (mi/trip)


# Ex 4: Single Supplier and Customer Location

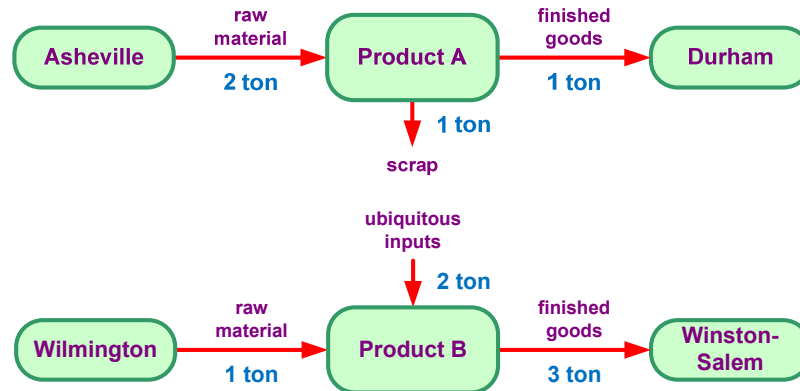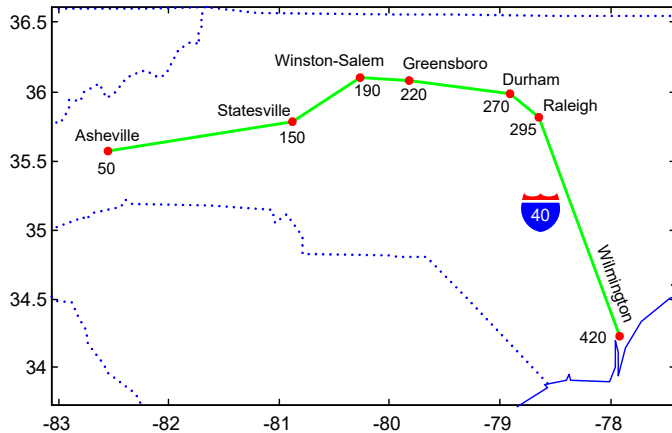

- The cost per ton-mile (i.e., the cost to ship one ton, one mile) for both raw materials and finished goods is the same (e.g., \$0.10).
  1. Where should the plant for each product be located?
  2. How would location decision change if customers paid for distribution costs (FOB Origin) instead of the producer (FOB Destination)?
    - In particular, what would be the impact if there were competitors located along I-40 producing the same product?
  3. Which product is weight gaining and which is weight losing?
  4. If both products were produced in a single shared plant, why is it now necessary to know each product's annual demand ( $f_i$ )?
 
$$TC(X) = \sum_{i=1}^m \underbrace{f_i r_i}_{w_i} d(X, P_i)$$




## Ex 5: 1-D Location with Procurement and Distribution Costs

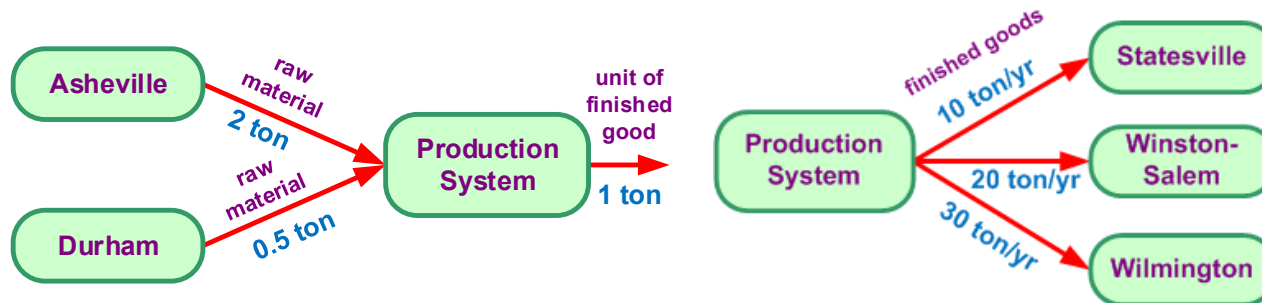

Assume: all scrap is disposed of locally

A product is to be produced in a plant that will be located along I-40. Two tons of raw materials from a supplier in Asheville and a half ton of a raw material from a supplier in Durham are used to produce each ton of finished product that is shipped to customers in Statesville, Winston-Salem, and Wilmington. The demand of these customers is 10, 20, and 30 tons, respectively, and it costs \$0.33 per ton-mile to ship raw materials to the plant and \$1.00 per ton-mile to ship finished goods from the plant. Determine where the plant should be located so that procurement and distribution costs (i.e., transportation costs to and from the plant) are minimized, and whether the plant is weight gaining or weight losing.



# Ex 5: 1-D Location with Procurement and Distribution Costs

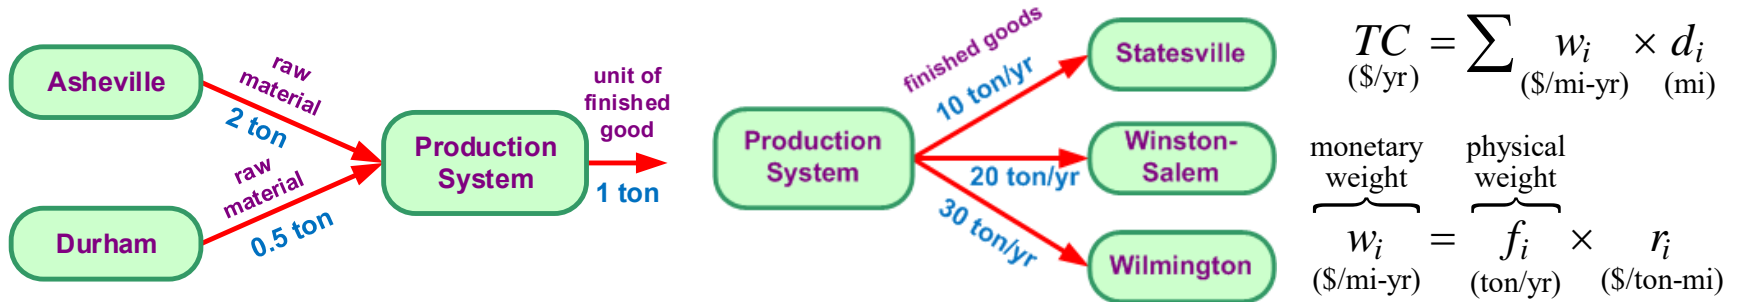

Assume: all scrap is disposed of locally

$r_{in} = \$0.33/\text{ton-mi}$


$r_{out} = \$1.00/\text{ton-mi}$

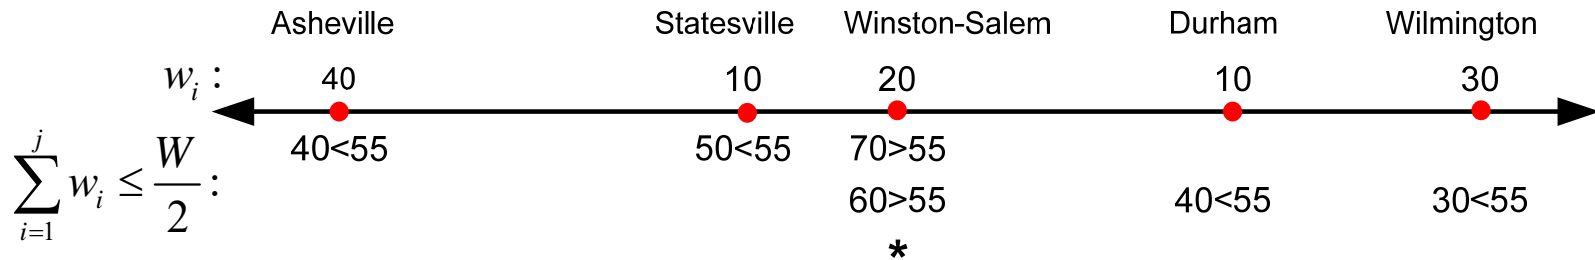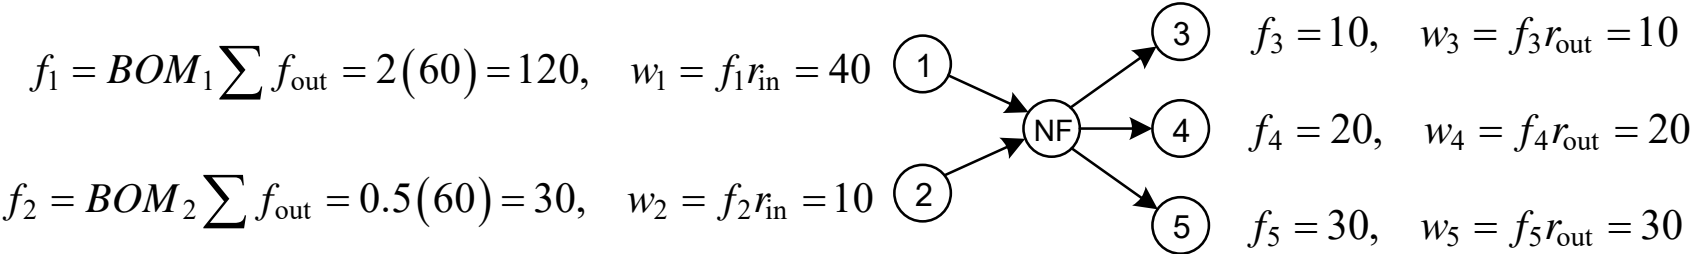

(Monetary) Weight Gaining:  $\sum w_{in} = 50 < \sum w_{out} = 60$

Physically Weight Losing:  $\sum f_{in} = 150 > \sum f_{out} = 60$


# 2-D Euclidean Distance

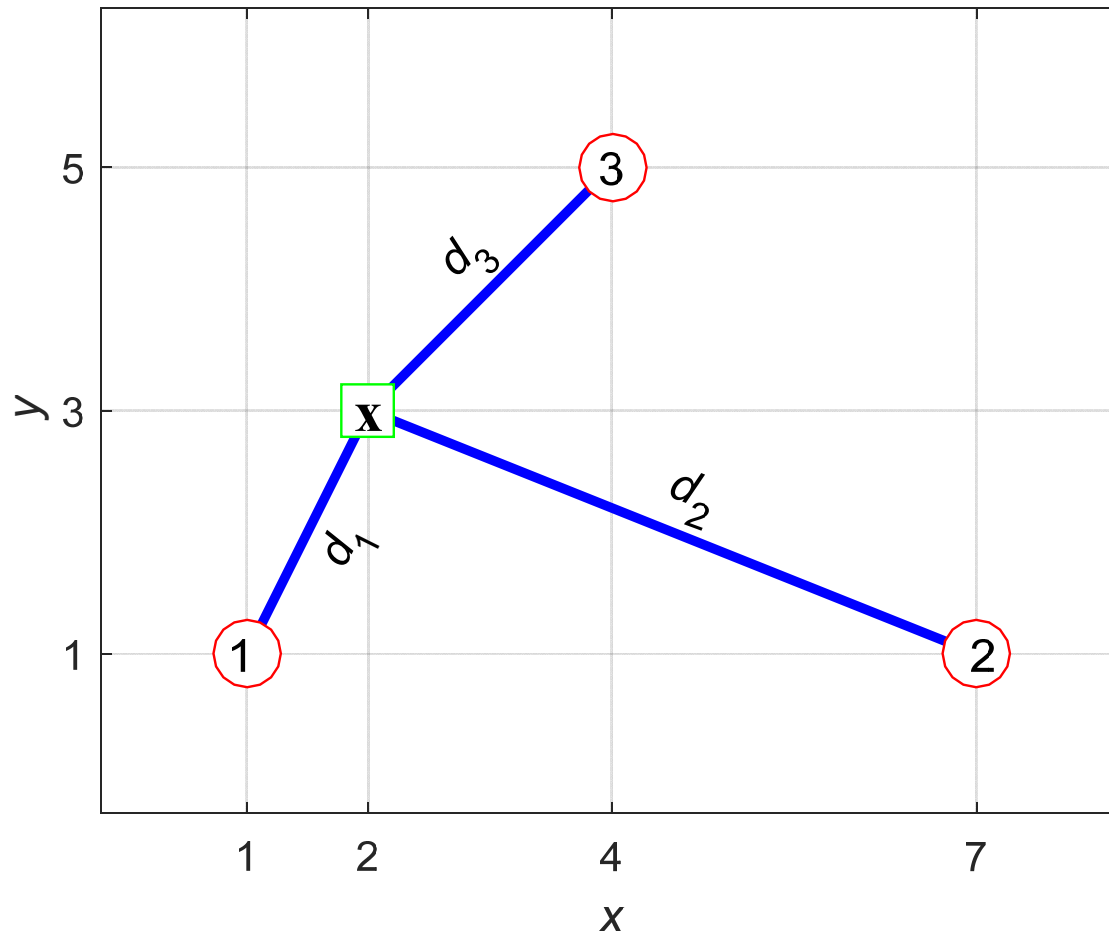

$$\mathbf{x} = [2 \quad 3], \quad \mathbf{P} = \begin{bmatrix} 1 & 1 \\ 7 & 1 \\ 4 & 5 \end{bmatrix}$$

$$\mathbf{d} = \begin{bmatrix} d_1 \\ d_2 \\ d_3 \end{bmatrix} = \begin{bmatrix} \sqrt{(x_1 - p_{1,1})^2 + (x_2 - p_{1,2})^2} \\ \sqrt{(x_1 - p_{2,1})^2 + (x_2 - p_{2,2})^2} \\ \sqrt{(x_1 - p_{3,1})^2 + (x_2 - p_{3,2})^2} \end{bmatrix}$$

# Minisum Distance Location

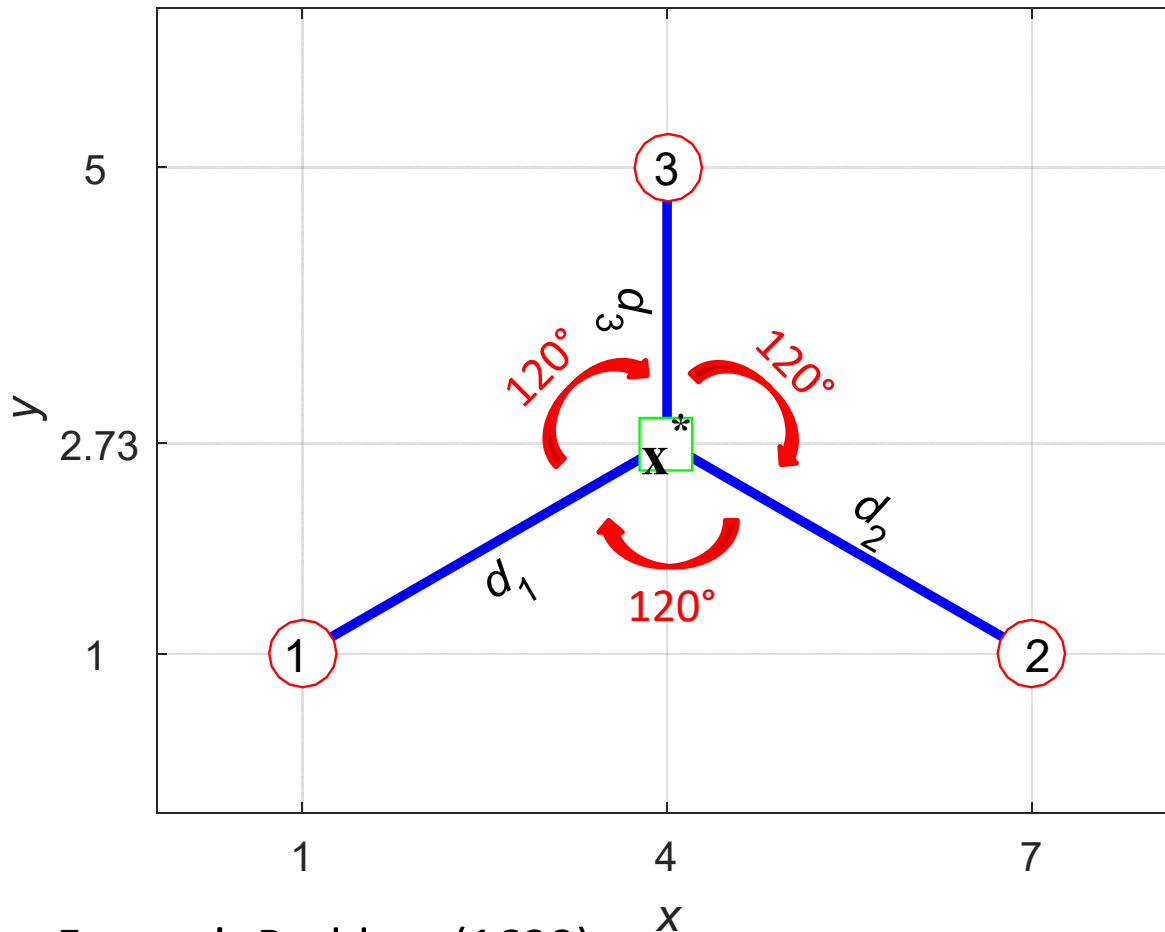

$$\mathbf{P} = \begin{bmatrix} 1 & 1 \\ 7 & 1 \\ 4 & 5 \end{bmatrix}$$

$$d_i(\mathbf{x}) = \sqrt{(x_1 - p_{i,1})^2 + (x_2 - p_{i,2})^2}$$

$$TD(\mathbf{x}) = \sum_{i=1}^3 d_i(\mathbf{x})$$

$$\mathbf{x}^* = \arg \min_{\mathbf{x}} TD(\mathbf{x})$$

$$TD^* = TD(\mathbf{x}^*)$$

Fermat's Problem (1629):

Given three points, find fourth (Steiner point) such that sum to others is minimized

(Solution: Optimal location corresponds to all angles =  $120^\circ$ )

# Minisum Weighted-Distance Location


- Solution for 2-D+ and non-rectangular distances:
  - *Majority Theorem*: Locate NF at EF $_j$  if  $w_j \geq \frac{W}{2}$ , where  $W = \sum_{i=1}^m w_i$
  - Mechanical (Varignon frame)
  - 2-D rectangular approximation
  - Numerical: nonlinear unconstrained optimization
    - Analytical/estimated gradient (quasi-Newton, `fminunc`)
    - Direct, gradient-free (Nelder-Mead, `fminsearch`)

$m$  = number of EFs

$$TC(\mathbf{x}) = \sum_{i=1}^m w_i d_i(\mathbf{x})$$



$$\mathbf{x}^* = \arg \min_{\mathbf{x}} TC(\mathbf{x})$$

$$TC^* = TC(\mathbf{x}^*)$$

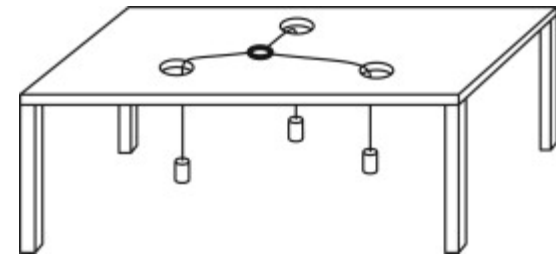

Varignon Frame

# Convex vs Nonconvex Optimization

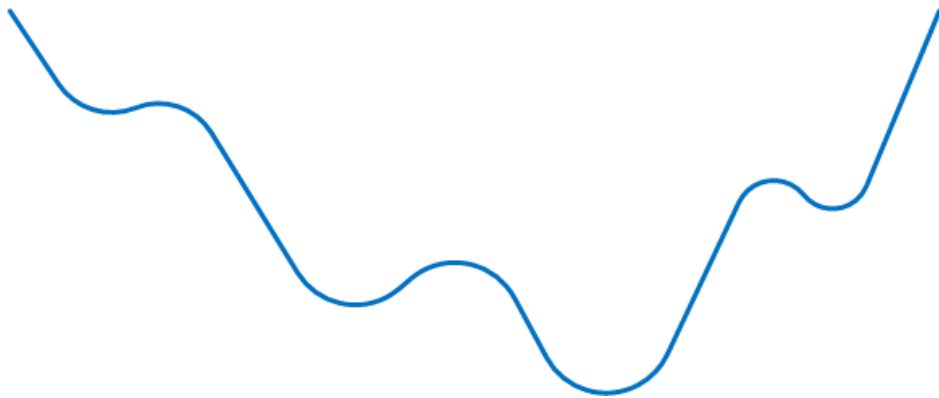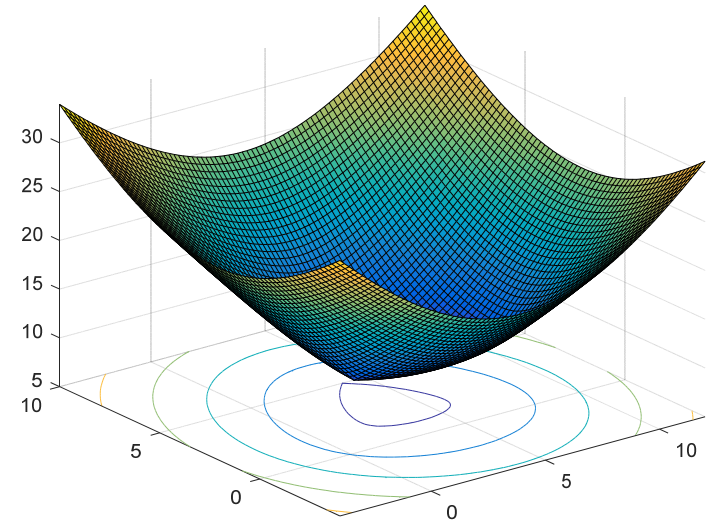


# Gradient vs Direct Methods

- Numerical nonlinear unconstrained optimization:


- Analytical/estimated gradient

- quasi-Newton
- `fminunc`

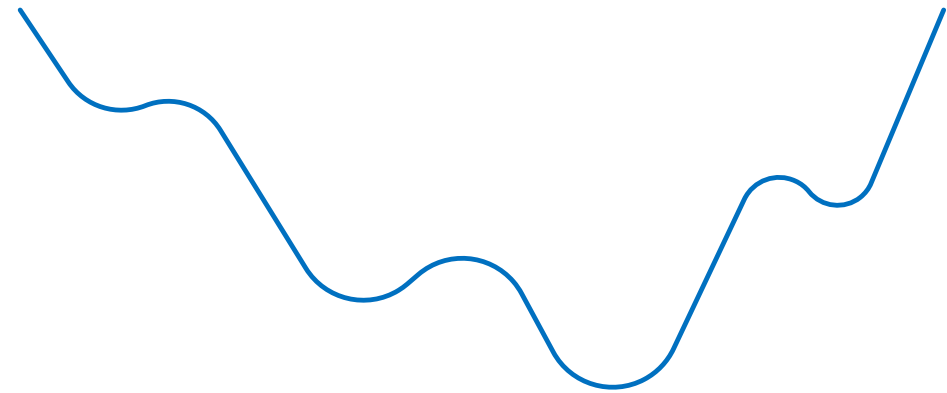



- Direct, gradient-free

- Nelder-Mead
- `fminsearch`

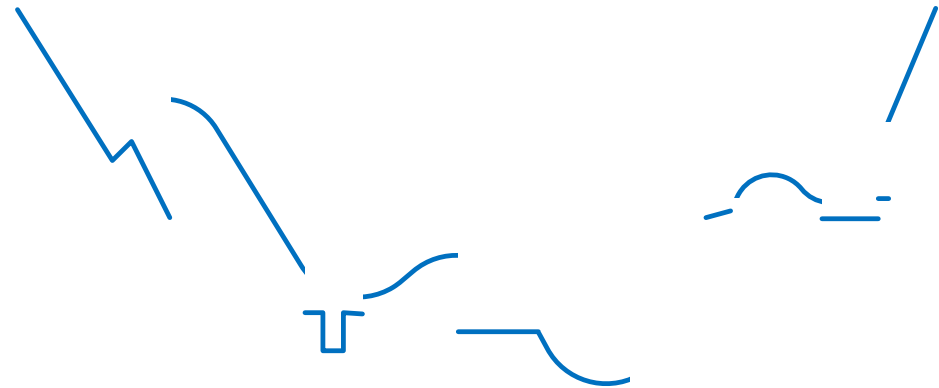


# Nelder-Mead Simplex Method

Nelder-Mead Simplex search over Banana Function

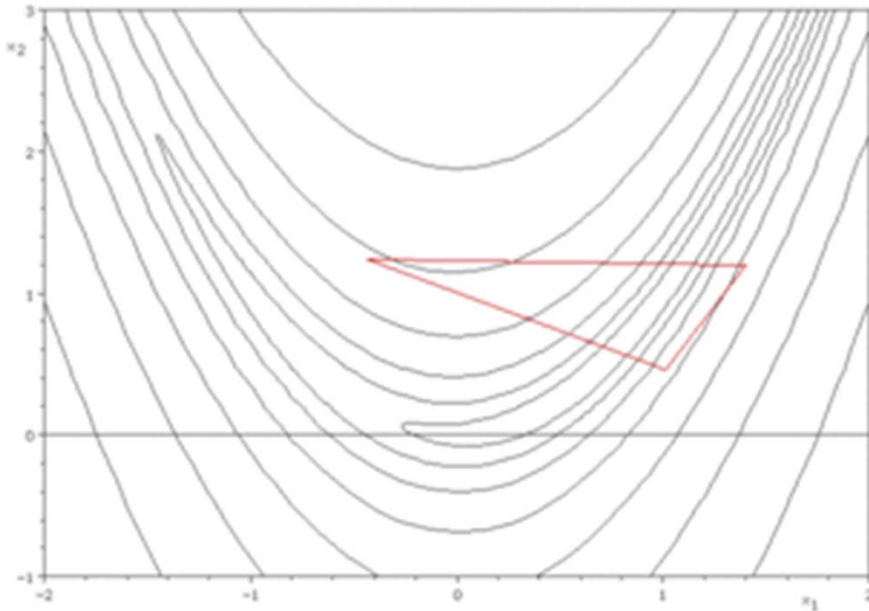


reflection

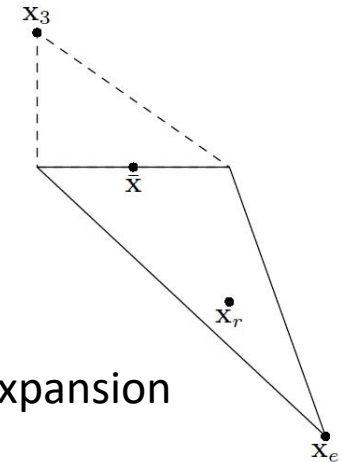


expansion


- AKA amoeba method
- Simplex is triangle in 2-D (dashed line in figures)

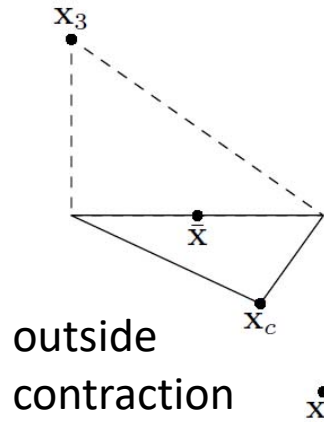

outside contraction




inside contraction



a shrink



# Feasible Region

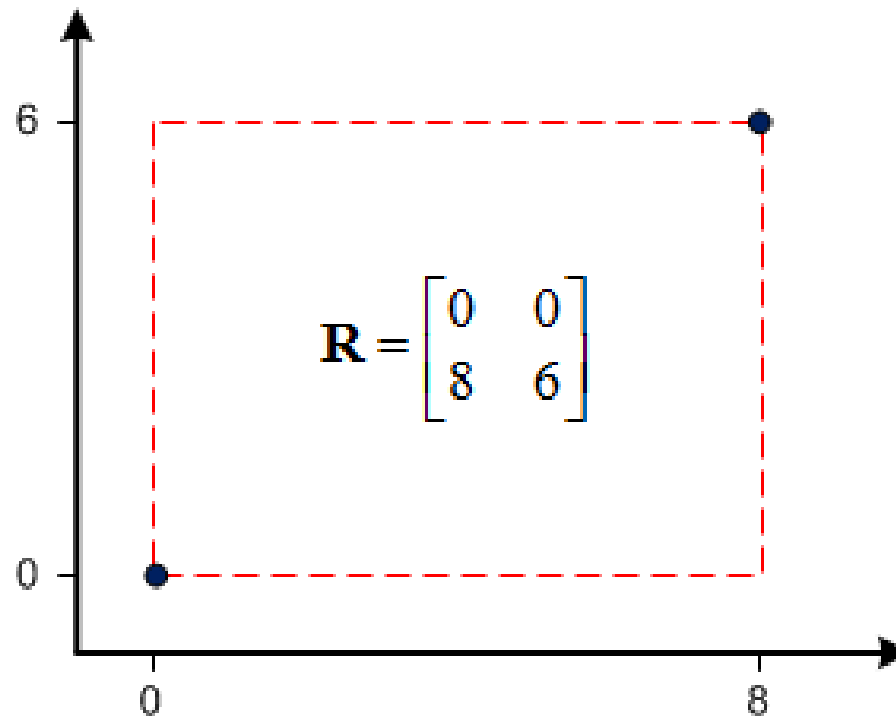

```
if a is true
  return b
else
  return c
end
```

$$= \text{iff}(a, b, c) = \begin{cases} b, & \text{if } a \text{ is true} \\ c, & \text{otherwise} \end{cases} \Rightarrow \begin{cases} TC(\mathbf{x}), & \text{if } \mathbf{x} \text{ is in } \mathbf{R} \\ \infty, & \text{otherwise} \end{cases}$$